


V1.0

### Connection

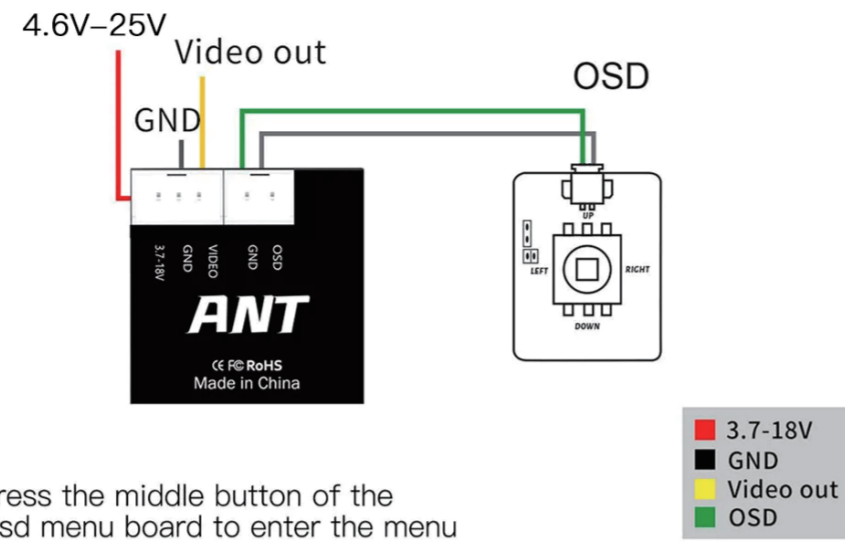

\* Press the middle button of the osd menu board to enter the menu  
Packing does not contain an osd menu board

### Camera menu


MAIN MENU	AE
AE	BRIGHTNESS <20>
WB	EXPOSURE MODE GLOBE
DAY&NIGHT	ADVANCED
IMAGE ENHANCE	RETURN
VIDEO SETTING	
LANGUAGE	
<ENGLISH>	
RESET	BRIGHTNESS (0-30)
SAVE EXIT	EXPOSURE
EXIT	MODE (GLOBE/ BLC)
	BLC (1-8)

### Camera manual

WE	DAY NIGHT
MODE <ATW>	MODE <EXT>
RETURN	RETURN
MODE (ATW/MWB)	MODE (BW/AUTO /COLOR/EXT)
RGAIN (0-32)	
BGAIN (0-32)	
IMAGE ENHANCE	VIDEO SETTING
CONTRAST <AUTO>	VIDEO STANDARD <PAL>
SHARPNESS <AUTO>	HD FORMAT CVBS
COLOR GAIN <AUTO>	
3DNR <AUTO>	
RETURN	RETURN
CONTRAST (MANUAL/ AUTO)	VIDEO STANDARD (PAL/NTSC)
SHARPNESS (MANUAL/AUTO)	
COLOR GAIN (MANUAL/AUTO)	
3DNR (MANUAL/AUTO)	


### Specification

Model	Caddx Ant lite	Caddx Ant
Image Sensor	1/3" CMOS Sensor	
Horizontal Resolution	1200 TVL	
TV System	NTSC or PAL	
MENU	Support	
IMAGE	16:9 or 4:3	
Synchronization	Internal	
Electronic Shutter	PAL: 1/50~100,000; NTSC: 1/60~100,000	
S/N Ratio	>52dB (AGC OFF)	
Video Output	CVBS	
Lens	2.1mm	1.8mm
Min. Illumination	0.001Lux@F1.2	
Auto Gain Control	YES	
BLC	YES	
WDR	Global WDR	
DNR	3D DNR	
Dimensions	14mm*14mm	14*14mm(bracket to 19*19mm)
Wide Power Input	DC 4.6V-25V	
Work Temperature	-20℃~+60℃	
Work Humidity	20%~80%	
Weight	1.5g (N.W.)	2g (N.W.)

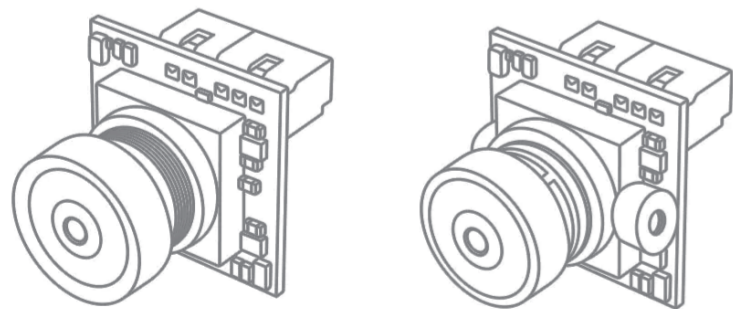

V1.0

### 连接示意图

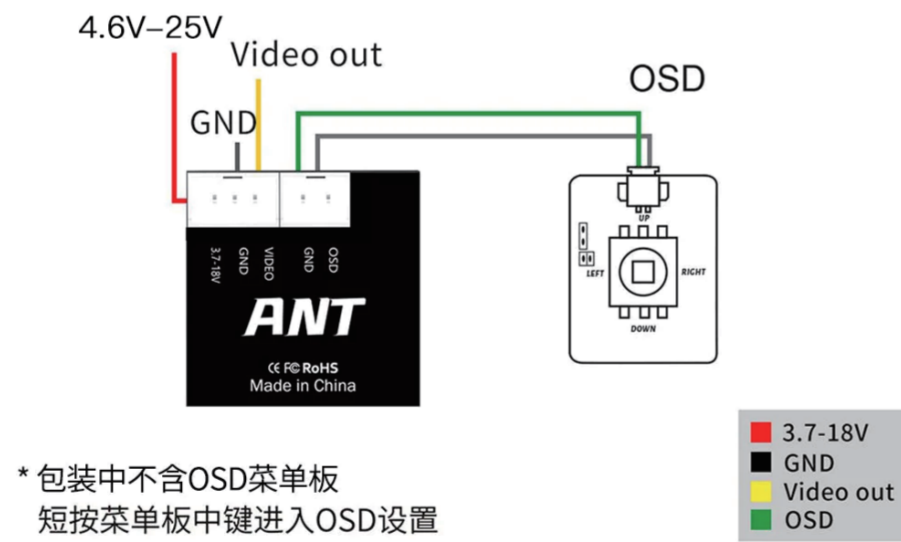

\* 包装中不含OSD菜单板  
短按菜单板中键进入OSD设置

### 相机菜单

主菜单	曝光
曝光	亮度 <20>
白平衡	曝光模式 全局
日夜切换	高级
图像增强	返回
视频设置	
语言 <中文>	
恢复出厂设置	
保存退出	
	亮度 (0-30)
	曝光模式(全局 /背光补偿)
	背光补偿 (1-8)

### 相机菜单

白平衡	日夜切换
模式	模式 <外部触发>
自动跟踪白平衡	返回
返回	
模式 (自动跟踪白平衡/手动白平衡)	模式(外部触发/内部触发/黑白/彩色)
红色增益 (0-32)	
蓝色增益 (0-32)	
图像增强	视频设置
对比度 <自动>	视频制式 <PAL>
锐度 <自动>	高清制式 CVBS
饱和度 <自动>	
3D降噪 <自动>	
返回 <自动>	返回
对比度 自动/手动	视频制式 <PAL/NTSC>
锐度 自动/手动	
饱和度 自动/手动	
3D降噪 自动/手动	

### 产品规格

Model	Caddx Ant lite	Caddx Ant
Image Sensor	1/3" CMOS Sensor	
Horizontal Resolution	1200 TVL	
TV System	NTSC or PAL	
MENU	Support	
IMAGE	16:9 or 4:3	
Synchronization	Internal	
Electronic Shutter	PAL: 1/50~100,000; NTSC: 1/60~100,000	
S/N Ratio	>52dB (AGC OFF)	
Video Output	CVBS	
Lens	2.1mm	1.8mm
Min. Illumination	0.001Lux@F1.2	
Auto Gain Control	YES	
BLC	YES	
WDR	Global WDR	
DNR	3D DNR	
Dimensions	14mm*14mm	14*14mm(bracket to 19*19mm)
Wide Power Input	DC 4.6V-25V	
Work Temperature	-20℃~+60℃	
Work Humidity	20%~80%	
Weight	1.5g (N.W.)	2g (N.W.)